

Product list

Please note

This product list includes all parts necessary for most applications.
For parts required for special applications, please refer to the MEVA price list. Dimensions are in centimetres (cm) unless a different unit is shown.





Contents

EuMax 20	25
EuMax 30	24
Tripod	23
VarioMax bracing rail	23
VarioMax Double Beam	22
VarioMax Slide-in Beam	22

Slab formwork support





VarioMax Double Beam

Made of aluminium, powder-coated RAL 3020 (traffic red). Basic girder used with thicker and higher slabs. The beam is provided with 2 spikes for props (refer to the MevaVarioMax Technical Instruction Manual).

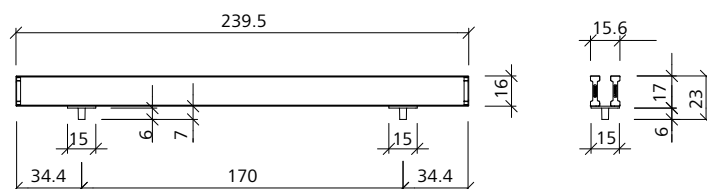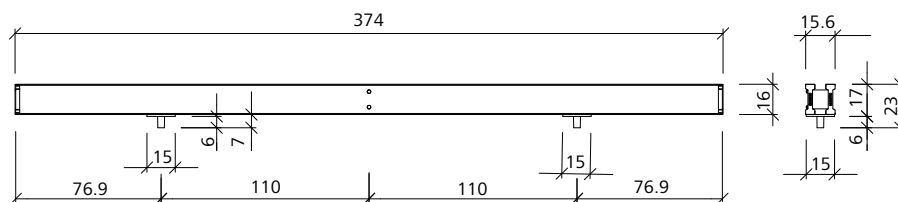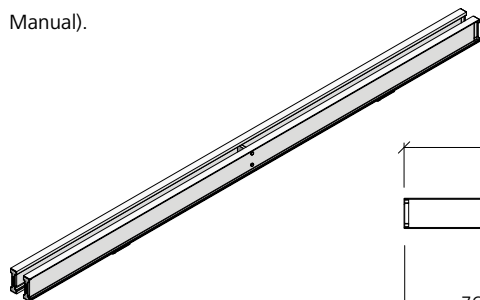

VarioMax Slide-in Beam

Made of aluminium, powder-coated RAL 9010 (white), provided with a spike for props. The slide-in beam is inserted into the VarioMax double beam and permits adjustment of the formwork to any size (refer to the MevaVarioMax Technical Instruction Manual).

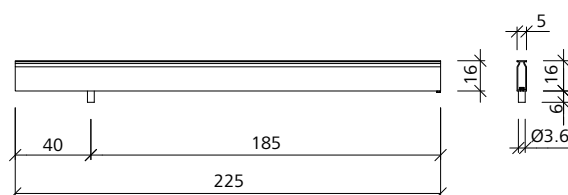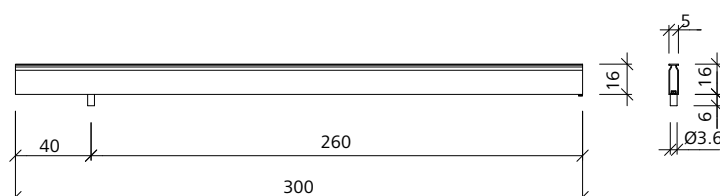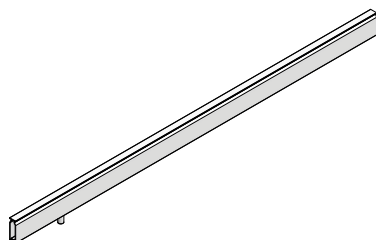


Ref. No.	Description / Application	m ²	kg
29-217-10	 VarioMax Double Beam 375.....	27.30	
29-217-20	 VarioMax Double Beam 240.....	17.80	

Ref. No.	Description / Application	m ²	kg
29-217-60	 VarioMax Slide-in Beam 300.....	14.91	
29-217-70	 VarioMax Slide-in Beam 225.....	11.24	


Slab formwork support

VarioMax bracing rail

Made of aluminium, length 2.48 m. Used for bracing the beams. All items are safely connected to each other. Therefore no parts can be lost. Is fixed to the slide-in beam by the hammerhead bolt. (refer to the MevaVarioMax Technical Instruction Manual).




Ref. No.	Description / Application	m ²	kg
29-217-90	VarioMax bracing rail	2.64	






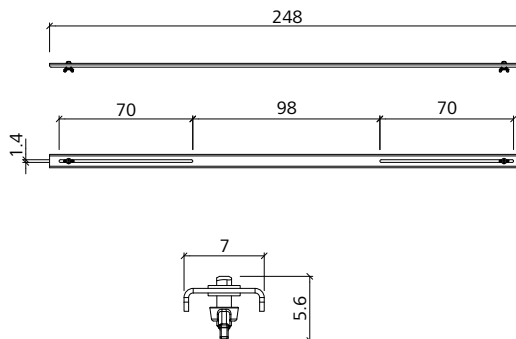


Tripod

Galvanized auxiliary to stabilize props with Ø 48 to 80 mm. The tripod's revolving legs allow it to be used in the middle of a room, along walls or in corners. Is attached to the aluminium profile of MEP props with the MD safety claw.



Ref. No.	Description / Application	m ²	kg
29-905-50	Tripod	12.20	
29-905-52	Tripod 120	17.70	

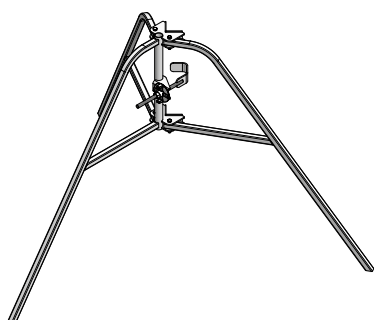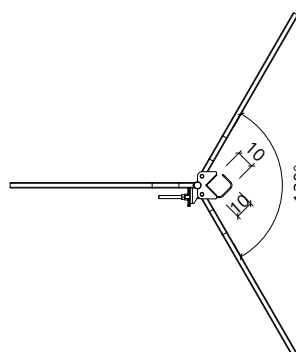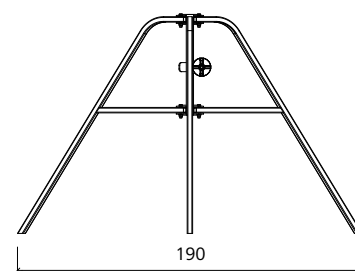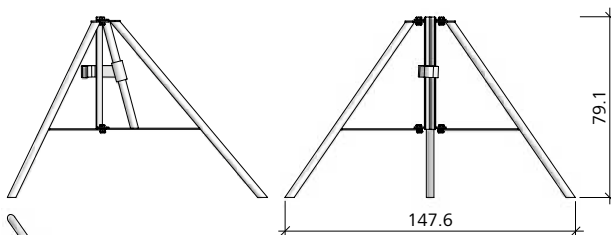


Slab formwork support

EuMax 30

Galvanized. Complies with European standard EN 1065, class E. The admissible load is 30 kN at all extensions. When used with MEVA formwork systems, higher loads may be admitted (see the MevaDec Technical Instruction Manual).

Ref. No.	Description / Application	m ²	kg
29-907-36	EuMax 20/300(177-300)		16.90
79-907-35	MD prop 300/20(175-300)		17.70
29-907-41	EuMax 20/400(232-400)		23.80
79-907-40	MD prop 400/20(225-400)		25.60
29-907-45	EuMax 20/550(302-550)		37.00
29-907-46	EuMax 30/150(98-150)		10.40

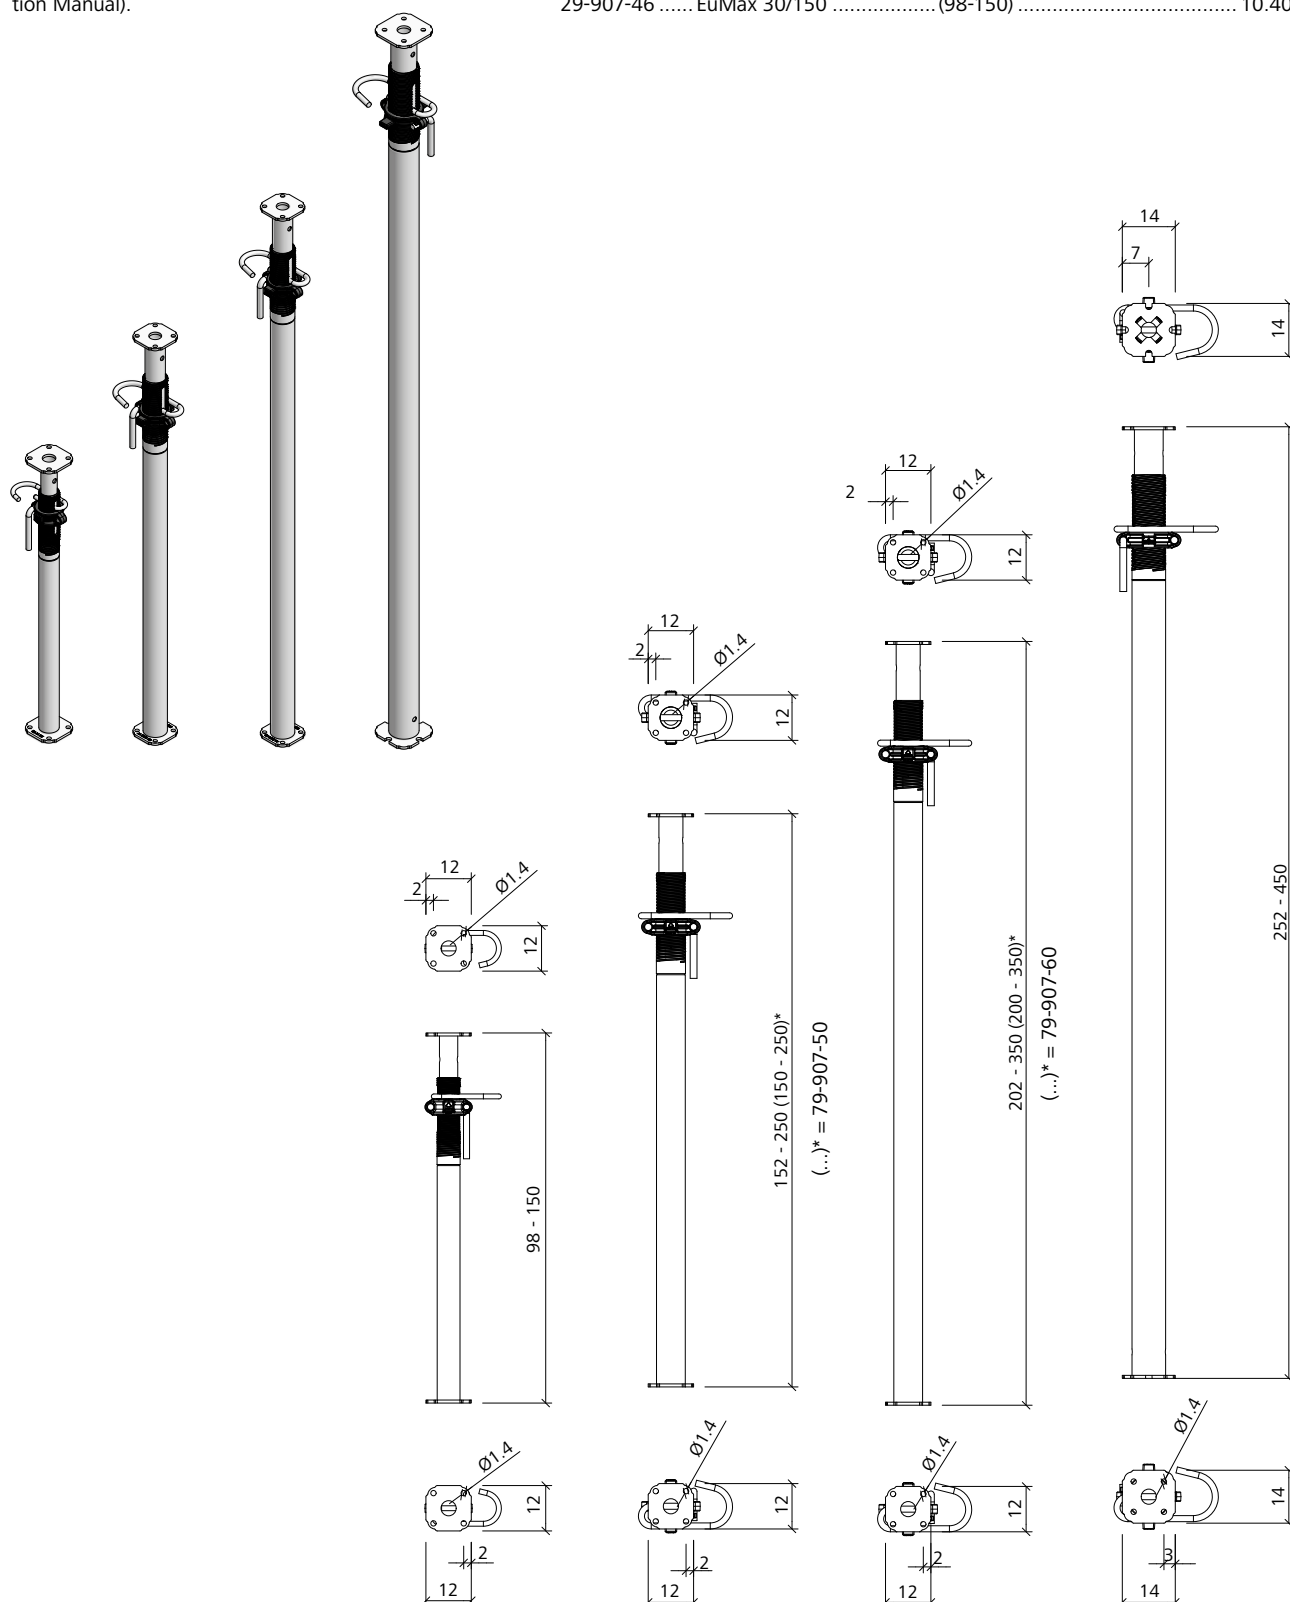

EuMax 20

Ref. No.	Description / Application	m ²	kg
29-907-51	EuMax 30/250 (152-250)	18.10	
79-907-50	ME prop 250/30 (150-250)	17.50	
29-907-61	EuMax 30/350 (202-350)	23.00	
79-907-60	ME prop 350/30 (200-350)	25.50	
29-907-62	EuMax 30/450 (252-450)	32.40	

Notes

Grid of dots for notes.

Notes

Grid of dots for notes.



MEVA Schalungs-Systeme GmbH

Industriestrasse 5 Tel. +49 7456 692-01
72221 Haiterbach Fax +49 7456 692-66
Germany info@meva.net

www.meva.net